


## Suspended Linear LED Luminaire

For Ambient Lighting

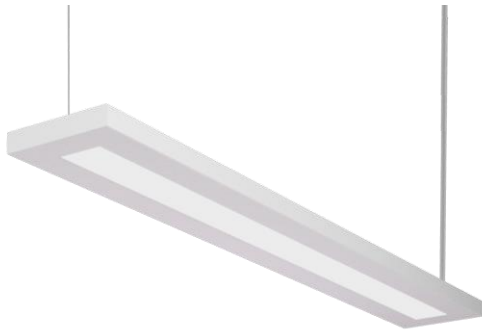

### Fixture Options

Example L250-82-4000-35K-M-A4-W-G1-WH-16

Series	L250	Lens	L250
Distribution	82 64 37	80%up / 20%dn – Std. 60%up / 40%dn 30%up / 70%dn Consult Factor for custom distributions	
Light Level	3000 4000 5000	3000lm per 4' section 4000lm per 4' section 5000lm per 4' section	
Color	30K 35K 40K 50K	3000K 3500K 4000K 5000K	
Driver	010 DAL	0-10 volt Dimming to 1% DALI Driver	
Power	M 3	120-277 347	
Mounting	A4 A10	Aircraft Cable 4' Adjustable Aircraft Cable 10' Adjustable	A_
Mounting Color	W B	White Cords and Canopies (STD) Black Cords and Canopies	
Ceiling	G1 G9 GS ST	15/16" Grid Ceiling 9/16" Grid Ceiling Slot Grid Ceiling Drywall/Structure	
Finish	WH SM BK CC	Standard White Silver Metallic Black Texture Custom Color	
Length	04 08 xx	Individual Individual Row Length (4' Increments)	
Options		Consult Factory	

Project: \_\_\_\_\_  
 Cat#: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Product Description

The L2 Suspended direct/indirect linear LED Luminaire is slim in profile and suitable for individual or continuous row mounting. The L2's LED technology offers significant energy efficiency over traditional sources to achieve efficacy's up to 140 lumens per watt!

### Construction

The L2 is constructed out of die formed steel and aluminum and is available in standard white or custom powder coat finishes. Lenses are high light transmission UV stable acrylic. Mounting to grid or drywall ceiling via fully adjustable aircraft cables.


### Light Source

Light source comprised of mid power LEDs that are thermally engineered to ensure optimal efficacies and 80+ CRI. Luminaire light output guaranteed to achieve a minimum of 70% luminaire output over 100,000 hours at typical 25 deg. C operating conditions. LED components and luminaires are compliant with IESNA LM80.

### Certification and Warranty

Luminaires carry a limited 5 year warranty and all luminaires are UL listed for indoor damp rated lighting applications. Standard Models are DLC Listed.

### Performance



L250	System Lumens (System Watts) for 4'		
	Distribution		
Light Level	80Up/20Dn	60Up/40Dn	30Up/70Dn
3000lm	3275lm (24.1w)	3234lm (25.3w)	3236lm (31.6w)
4000lm	4250lm (33.0w)	4246lm (36.2w)	4215lm (41.7w)
5000lm	5280lm (41.7w)	4840lm (41.7w)	5150lm (51.0w)
6000lm	6225lm (49.2w)	6100lm (52.6w)	6125lm (60.6w)

### Dimensions

