







PERFORMANCE

LINEAR


SYSTEM



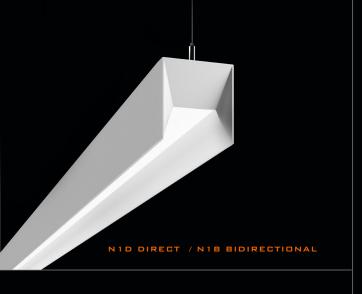

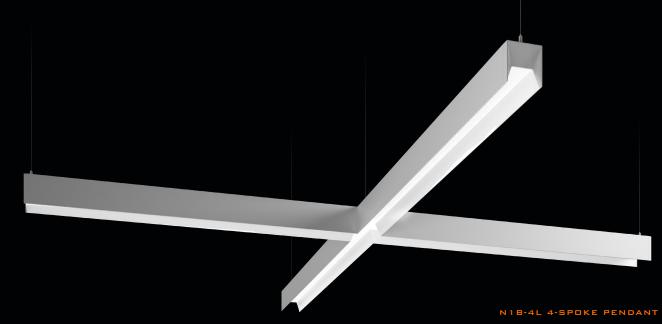






Recessed configurations, high performance optics and integral driver for ease of installation.




ONE



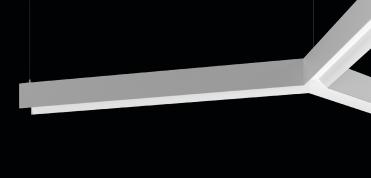



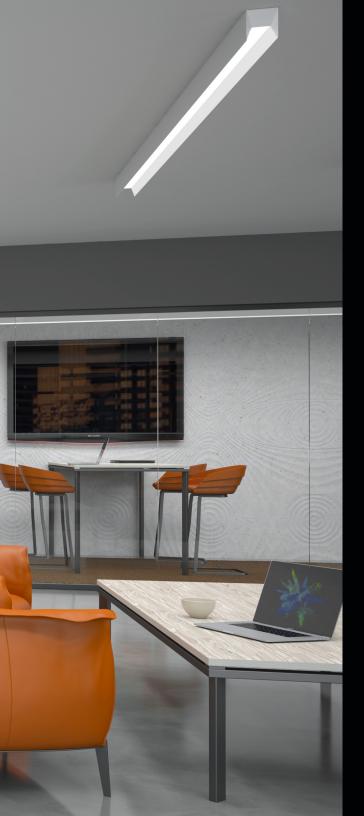



## DESIGN

Minimalist four inch rectilinear profile

Luminous regressed lens cavity

Elegant knife edge trim

## CONSTRUCTION

Extruded aluminum construction

Die-formed internal components

Die-cast endcaps

White, Silver, Black or custom color finish

#### PERFORMANCE

High-Performance optics balancing widespread distribution, precise cutoff and glare control

## CONFIGURATIONS

N1D Suspended Direct

N1B Suspended Bidirectional Indirect Direct

N1S Surface Mount Direct

N1R Recessed Direct Mounting Options

## INSTALLATION


Integral driver for simple installation Individual or continuous row mounting

# TRANSITIONS

90° luminous corners

3 or 4 spoke pendant configurations



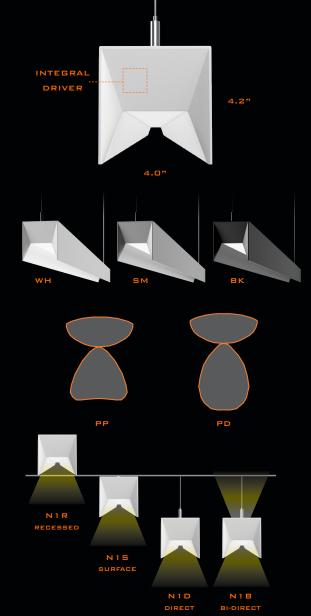

#### INDIVIDUAL LENGTHS

4'
6'
8'
CONTINUOUS LENGTHS

